

(TXTS)

(MFTR) FOSCARINI SPA-Test by Studio Oleandri - Milano

(LUMN) SOSPENSIONE 100W E27 PAR30

(CACU)


(TS) 100W E27 PAR30 - 30° (TOLU) 1500

(CAP) 182M071 TRESS SOSP MEDIA

(IDNM) TRESS_SP_182M071.LDT

(PLA)

DIAGRAMMA POLARE (cd/klm)

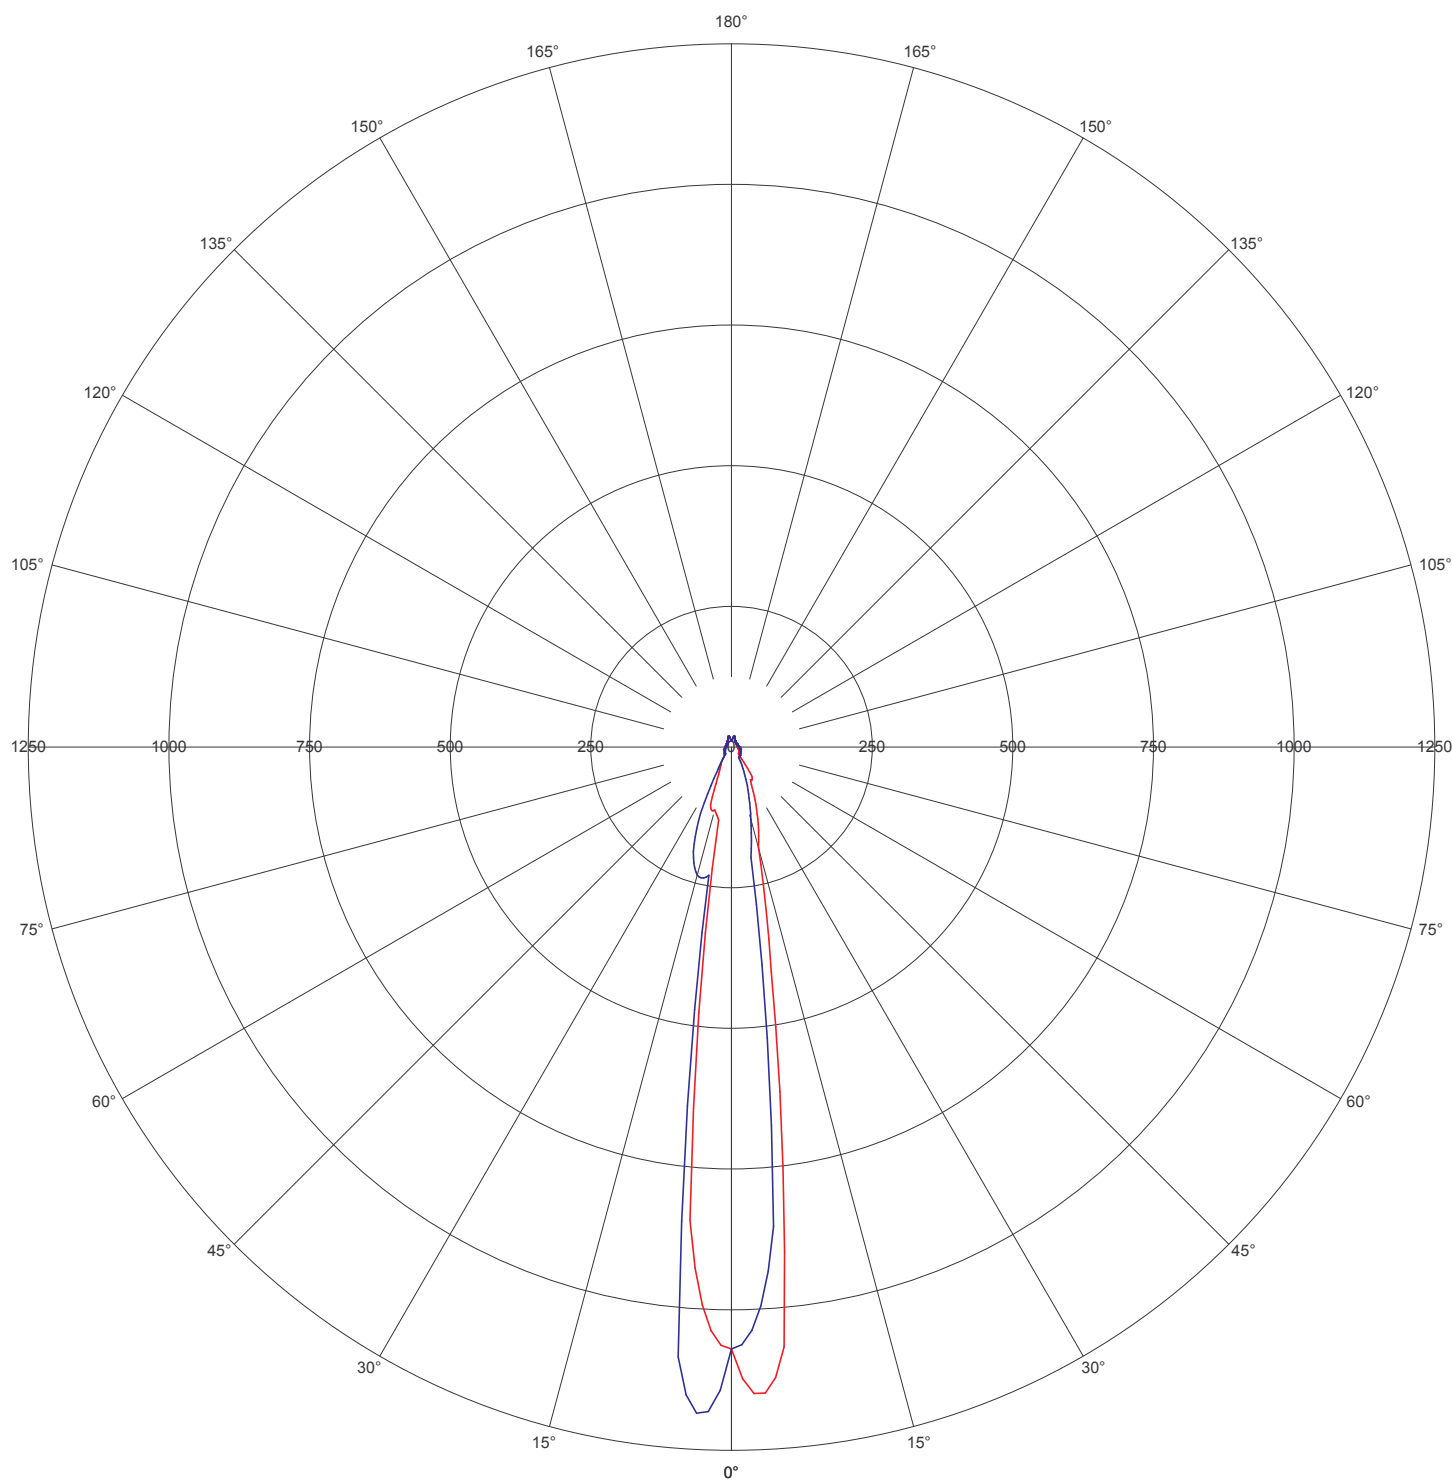

C = 0-180° 90-270°

Codice CIE: 72 83 92 78 32

Rendimento: LOR = 31,7; DLOR = 77,6; ULOR = 22,4

Apertura fascio: C0-180 = 13,9°; C90-270 = 13,2°

Asimmetria: IMax = 1196,4 cd/klm; C = 285,0°; gamma = 2,5°

Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°