


(LUMN) 50W LED SOSPENSIONE
(CACU)
(TS) 50W LED (TOLU) 4869

(CAP) TROAG M LED (Originale)
(IDNM) 2021000059 / Studio Oleandri
(PLA)

DIAGRAMMA POLARE (cd/klm)

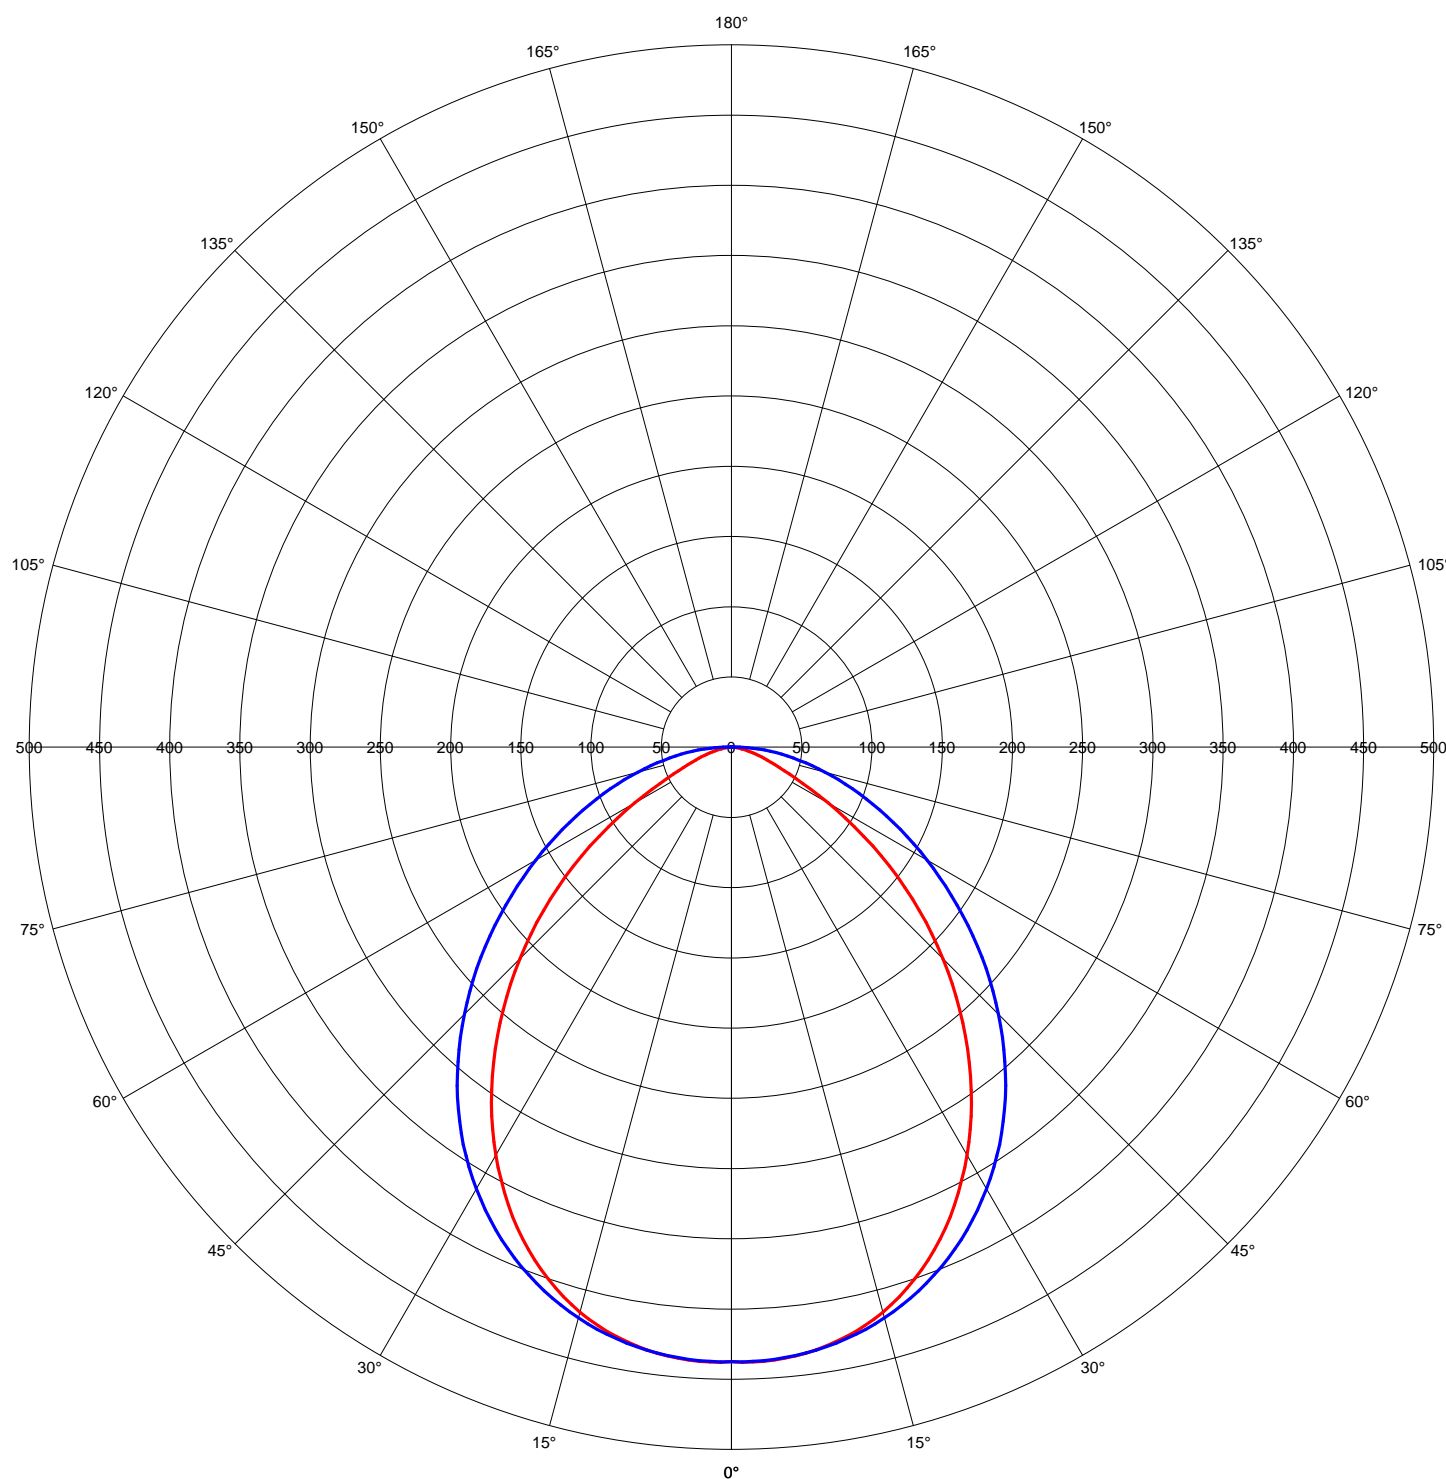

C = 0-180° 90-270°

Codice CIE: 56 86 98 100 100
Rendimento: LOR = 100,0; DLOR = 100,0; ULOR = 0,0
Apertura fascio: C0-180 = 88,0°; C90-270 = 102,0°
Asimmetria: IMax = 438,0 cd/klm; C = 0,0°; gamma = 2,0°
Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°