


(LUMN) SOSPENSIONE 24W LED
(CACU)
(TS) 24W LED (TOLU) 547

(CAP) PR178V1 55 BUDS1 MARRONE
(IDNM) 2017000047-048 / Studio Oleandri
(PLA)

DIAGRAMMA POLARE (cd/klm)

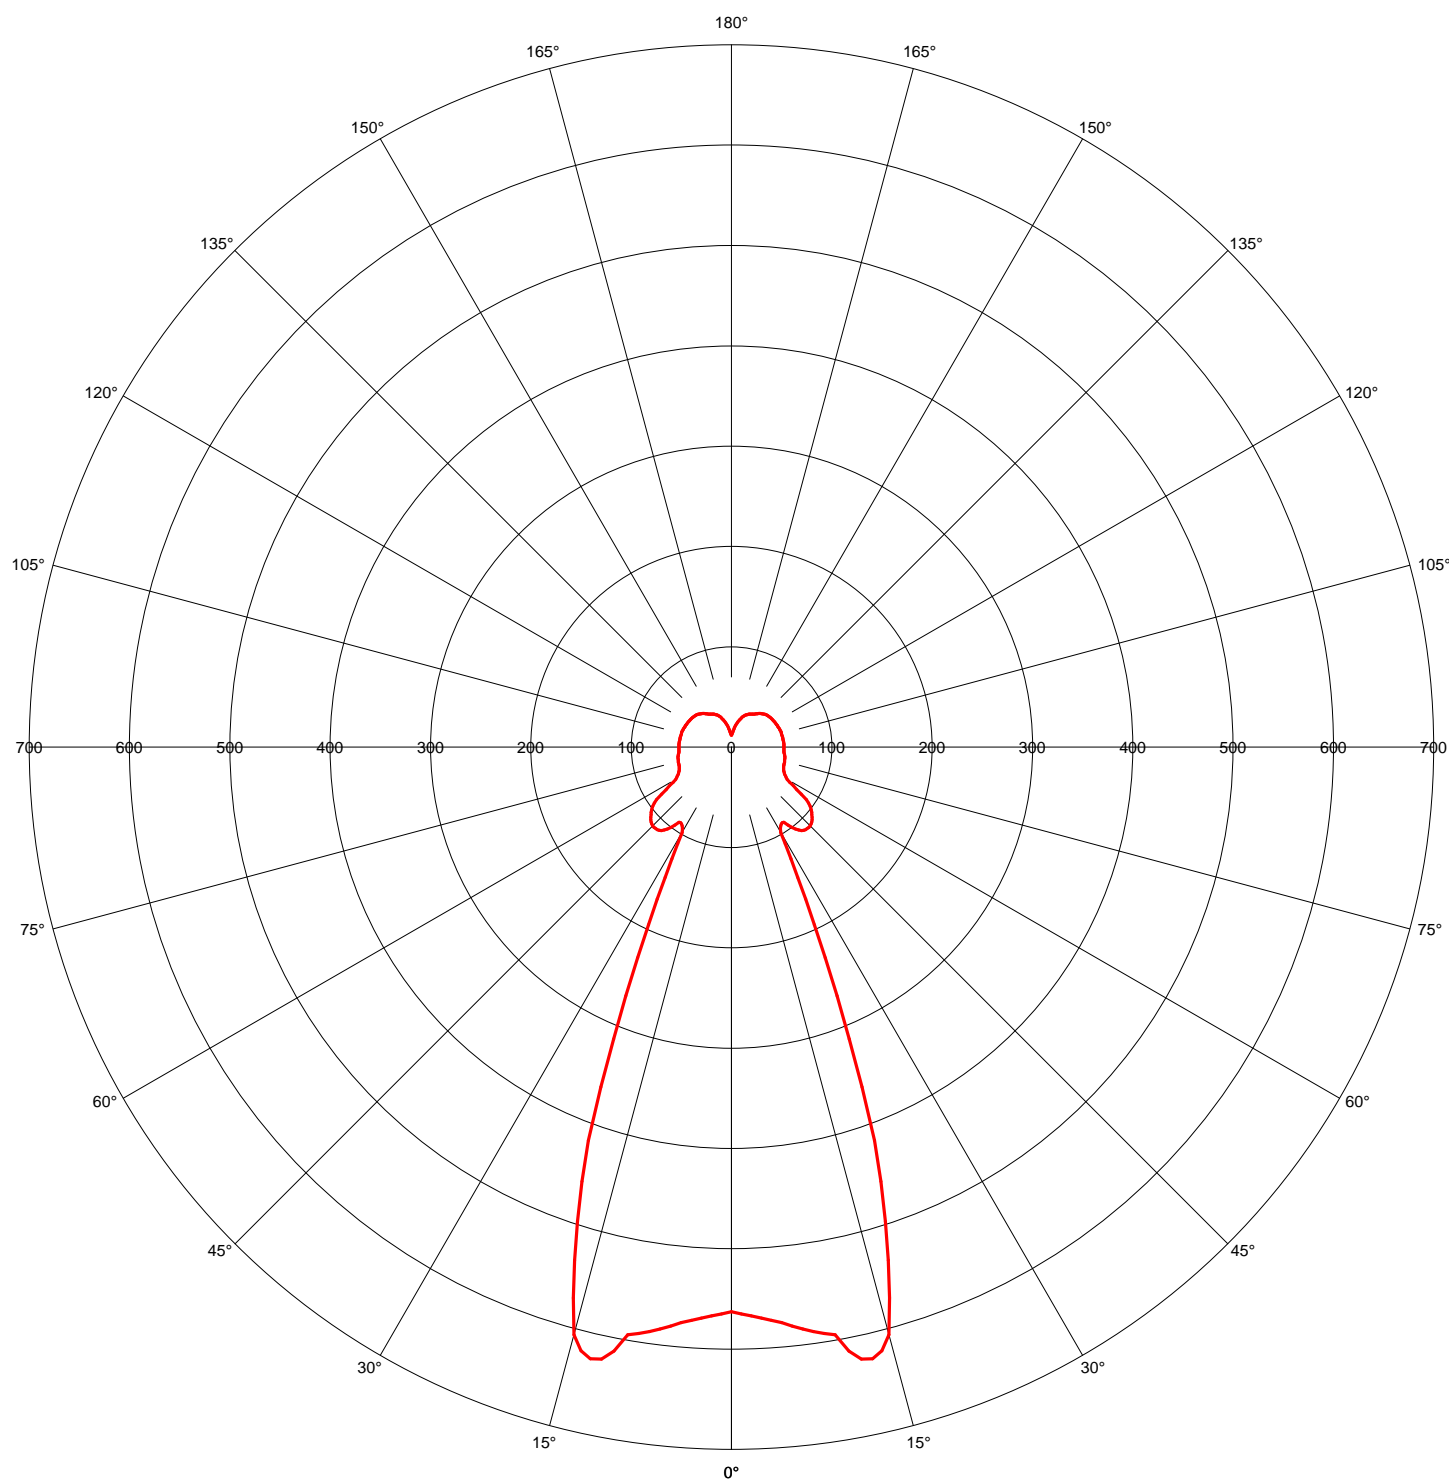

C = 0-180°

Codice CIE: 54 75 88 71 100
Rendimento: LOR = 100,0; DLOR = 70,7; ULOR = 29,3
Apertura fascio: C0-180 = 44,0°; C90-270 = 44,0°
Asimmetria: IMax = 625,6 cd/klm; C = 0,0°; gamma = 13,0°
Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°