


(LUMN) APPLIQUE 8W LED
(CACU)
(TS) 8W LED (TOLU) 217

(CAP) 285025-15 SATELLIGHT
(IDNM) 2017000582-583 / Studio Oleandri
(PLA)

DIAGRAMMA POLARE (cd/klm)

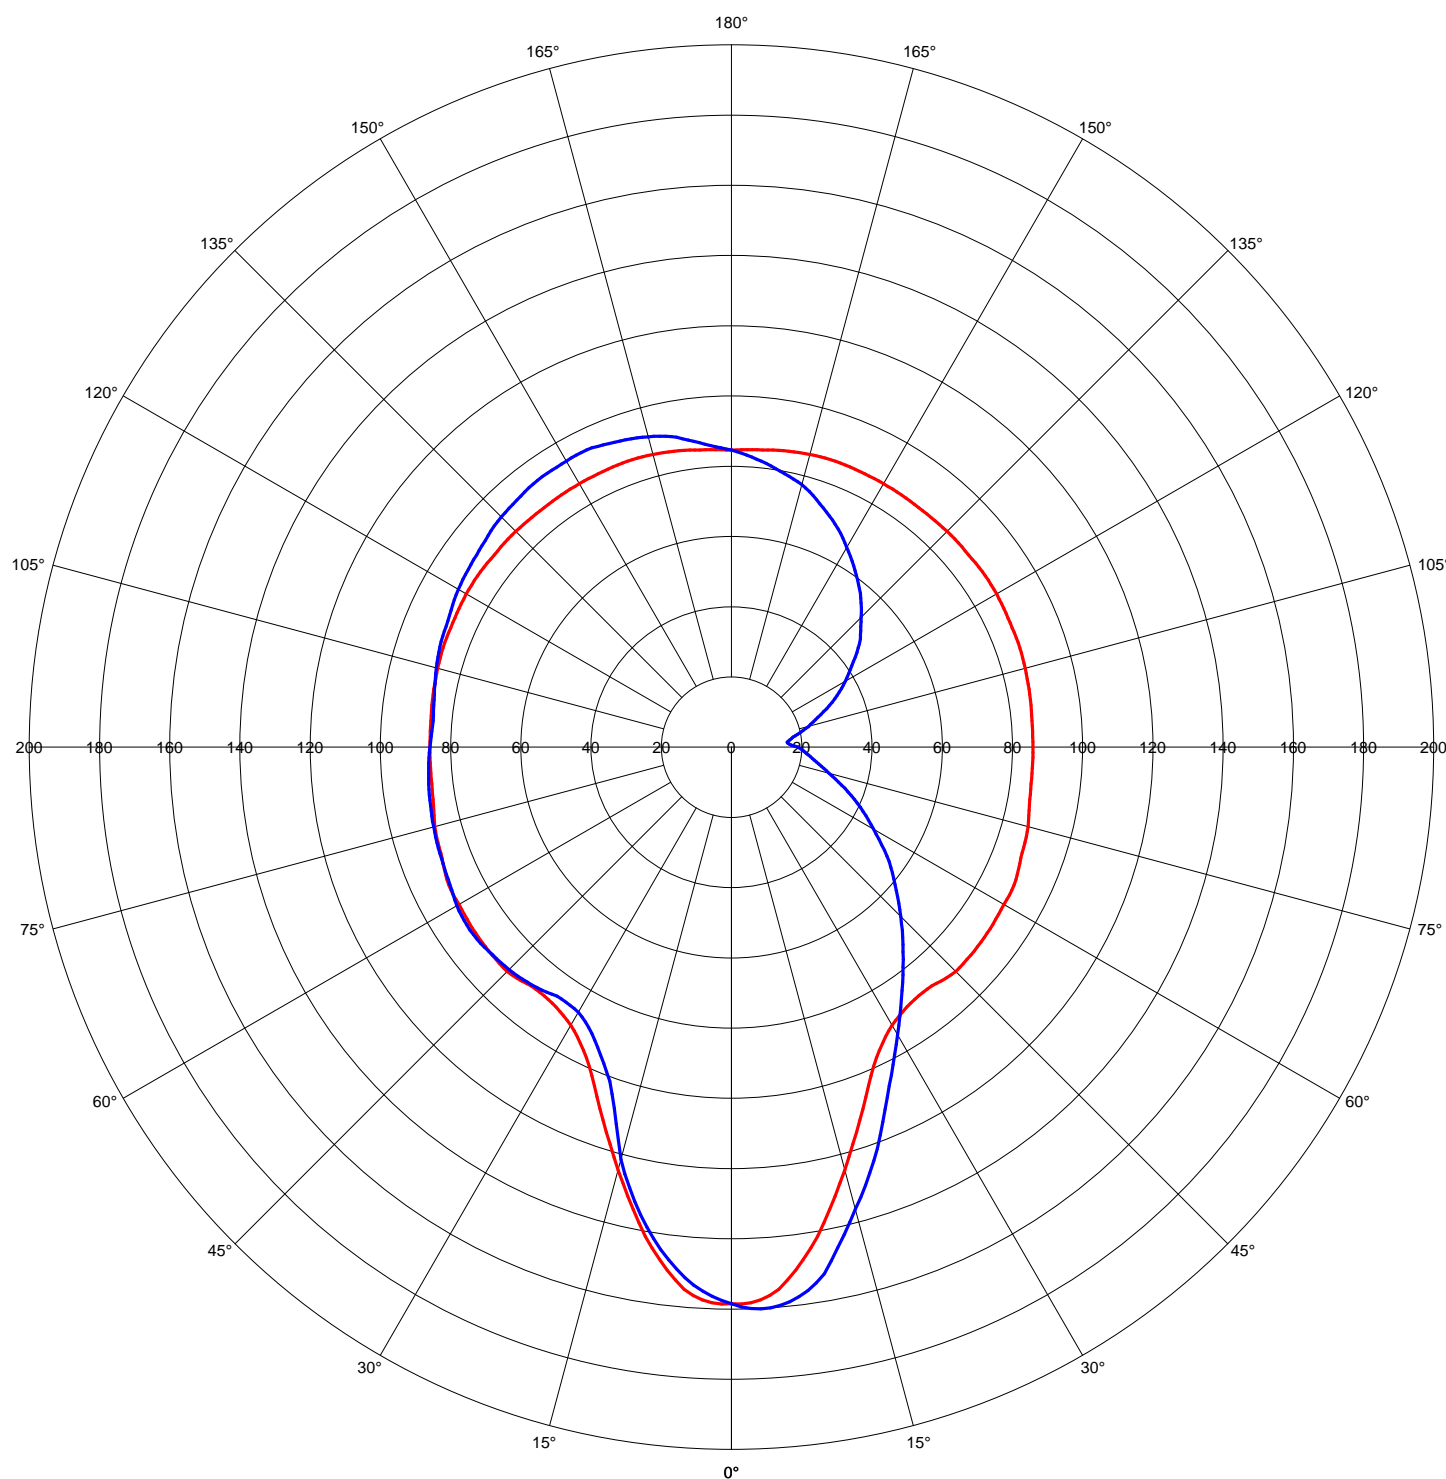

C = 0-180° 90-270°

Codice CIE: 30 55 78 52 100
Rendimento: LOR = 100,0; DLOR = 52,1; ULOR = 47,9
Apertura fascio: C0-180 = 0,0°; C90-270 = 209,0°
Asimmetria: IMax = 160,1 cd/klm; C = 90,0°; gamma = 3,0°
Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°